



PeopleTools 7.61 Release Notes

April 6, 2001

PeopleBooks Contributors: Teams from PeopleSoft Product Documentation and Development.

Copyright © 2001 by PeopleSoft, Inc. All rights reserved.

Printed in the United States of America.

All material contained in this documentation is proprietary and confidential to PeopleSoft, Inc., is protected by copyright laws, and subject to the nondisclosure provisions of the applicable PeopleSoft agreement. No part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, including, but not limited to, electronic, graphic, mechanical, photocopying, recording, or otherwise without the prior written permission of PeopleSoft, Inc.

This documentation is subject to change without notice, and PeopleSoft, Inc. does not warrant that the material contained in this documentation is free of errors. Any errors found in this document should be reported to PeopleSoft, Inc. in writing.

The copyrighted software that accompanies this documentation is licensed for use only in strict accordance with the applicable license agreement which should be read carefully as it governs the terms of use of the software and this documentation, including the disclosure thereof.

PeopleSoft, the PeopleSoft logo, PeopleTools, PS/nVision, PeopleCode, PeopleBooks, and Vantive are registered trademarks, and *PeopleTalk* and "People power the internet." are trademarks of PeopleSoft, Inc. All other company and product names may be trademarks of their respective owners. The information contained herein is subject to change without notice.

About These Release Notes

Version 01: 4/06/2001

[Edit History](#)

PeopleTools 7.61 is a maintenance release that resolves several minor issues in PeopleTools 7.5x as well as provides a handful of new features. We refer to this kind of maintenance release as a “PeopleTools-Only” upgrade. This means your applications will not be affected.

PeopleTools 7.61 does not contain database changes.

This is a "living" document to which we will add updates and corrections as needed so we can support our maintenance releases in a more dynamic manner giving you the most current information. We suggest that you check this site regularly to see if any updates were added to this document. When this document has been updated, a new version number and date will appear at the top of the document. Click the Edit History link to keep track of the changes to the document.

Important! If you skipped any maintenance releases, we recommend that you download the Release Notes corresponding to the release(s) you skipped. For instance, if you're installing the PeopleTools 7.61 update but skipped PeopleTools 7.60, you should download and review the Release Notes for PeopleTools 7.60. Do this to make sure that you are aware of the previous changes and new features. Most importantly, when upgrading to a new maintenance release, be sure to check the PeopleSoft Platforms database on Customer Connection for any new support details.

Topics

[Upgrade Instructions](#) to assist you with your upgrade from PeopleTools 7.5x to 7.61.

A description of the [New Features and Highlights](#), as well as instructions for implementing fixes.

A summary of the [Resolved Incidents](#) contained in this release.

Table of Contents

<i>About These Release Notes</i>	4
Upgrade Instructions	6
New Features and Highlights	10
Batch Components	10
SQR.....	10
COBOL.....	10
Application Designer	11
Field Definitions.....	11
Cube Manager.....	11
Attribute Name Modification.....	11
Database Server	11
New Script for Oracle/NT 8.0x Customers	11
Note to Oracle 8.1.7 Customers.....	12
HTML Access.....	12
Known Limitations	12
PeopleCode.....	13
Clarification to PeopleTools 7.5 PeopleBook: Development Tools, PeopleCode.....	13
Process Scheduler.....	14
SQL Trace for UNIX	14
Web Client	14
New Automatic Logout Parameter.....	14
Controlling the Speed of the Flashing Save Button.....	15
Windows Client	16
Saving Column Size in the Worklist Navigator View.....	16
Workflow	16
Maintaining the Scroll Position in a Worklist.....	16
Resolved Incidents	17

Upgrade Instructions

The following instructions are intended for a "PeopleTools-Only" upgrade for PeopleTools 7.5x. We recommend that you have your *PeopleSoft Installation and Administration* book for your RDBMS nearby in case you require any additional information.

Note. If you are installing PeopleTools 7.61 without having first installed PeopleTools 7.5x, use the PeopleTools 7.61 product CD-ROM as part of the standard installation process described in your *PeopleSoft Installation and Administration* book.

To upgrade from PeopleTools 7.5x to PeopleTools 7.61

1. Make sure you have the most current information *before* upgrading.

Often, customers do not begin the actual upgrade or install of a release until a week or even a month after receiving their PeopleSoft shipment. When such a delay occurs, you should always ensure that you are equipped with the most current information. Without the most current information you may risk missing an important update or announcement. To ensure that you have the most current information, complete the following tasks:

- **Download the most current version of the Release Notes for this PeopleTools version.** Compare the date that appears at the top of this document in the "version" line to the date that appears at the top of the Release Notes posted on Customer Connection. If the document posted on Customer Connection is a more recent version, then download it and use it for your upgrade. We strongly encourage you to read the entire document **before** beginning the upgrade. It is important to be aware of any new support policies as well as any new features.
- **Download the Release Notes for any minor releases that you skipped.** For instance, if you're upgrading from PeopleTools 7.59 to PeopleTools 7.61, you need to download the Release Notes for PeopleTools 7.60. We strongly encourage you to read all of the applicable Release Notes before beginning the upgrade. As stated previously, it is important to be aware of any new support policies as well as any new features (even in the releases you skipped).
- **Refer to the PeopleSoft Platforms Database on Customer Connection to make sure your entire environment is still supported by PeopleSoft.** Check all categories that apply to your workstations, servers, third party software, and language preferences. Since new versions of database software and third party software are continually released, our support policies evolve to incorporate the newest releases. In some cases, when we move to support the most recent version of a particular product it means that we drop support for a previous version. In short, you should always make sure you are on a supported environment **prior** to beginning an upgrade.

To get this information go to www.peoplesoft.com and navigate to the following location: Customer Connection (you will be prompted for a username and password), Library. From Library you can access Documentation (where the Release Notes are posted) and PeopleSoft Platforms (where the most current support information resides).

2. Shut down any application servers, web servers, and Process Scheduler servers.

Make sure that there are no "lingering" threads from any application server domains. Such threads can interfere with the successful installation of new application server files. If any threads remain after you shutdown the domains, you need to manually remove them.

AIX Note. With PeopleTools-Only upgrades, AIX tends to leave library files “hung” in shared memory after you shut down the Process Scheduler or application server. If this is the case, Process Scheduler and application server files can not be transferred successfully during Server Transfer. Typically, you’ll see an error in the FTP log stating that the affected files were still in use and could not be overwritten. If this problem occurs, delete all the contents of \$PS_HOME/bin and then run the transfer program again.

3. If you customized any configuration files (such as psappsrv.cfg, psconfig.sh, pspt, pscbl.mak, and psrun.mak), copy the customized files to another directory so they are not overwritten during the upgrade process.

Configuration files are typically overwritten when you run PSTRANS.EXE and PSAPPSRVXFR.BAT, the server transfer utilities.

Tip. You may want to print the old configuration files so you can easily refer to them in subsequent steps.

4. Backup your existing PeopleTools 7.5x directories.
5. Install the PeopleTools 7.61 software to the file server from the PeopleTools CD-ROM.

Run SETUP.EXE and install the software in the same directory where you installed the previous PeopleTools 7.5x software.

6. If you are installing PeopleTools in languages other than English, run \PS_HOME\LANGPACK\SETUP.EXE.

Use the same license code you used when you installed the PeopleTools 7.5x CD-ROM.

Note to NetExpress Users. COBOL delivered with PeopleSoft is compiled with NetExpress 2.0. If you are using NetExpress 3.0 you must apply the NetExpress 3.0 fix. **You do not need to apply the NetExpress 3.0 fix if you are already on NetExpress 3.0 SP1.**

Navigate to <http://support.merant.com/websupport/websync/netxarc3.asp>. Apply the following fixpacks: File Handler Fixpack 1.0.001 (needed by Run Time Fixpack), Run Time Fixpack 1.0.004, and Compiler Fixpack 1.0.005. After applying the fixpacks you will need to copy the following files from the %NETEXPRESS%\BASE\BIN directory to the %PS_HOME%\cblbin directory: CBLINTS.DLL, CBLRTSS.DLL, CBLVIOS.DLL, and COB32API.DLL. All programs MUST be recompiled. Please note that you will need to recompile with each new PeopleTools 7.5x maintenance release.

7. Transfer the PeopleTools 7.61 files from the file server to the application server.
 - **UNIX.** Run PSTRANS.EXE to transfer the files.
 - **Windows NT.** Run PSAPPSRVXFR.BAT to transfer the files.

Novell Note. Novell servers have a 128-character limitation that can cause the file server to skip or not transfer all of the files. If this occurs, install PeopleTools and the application codeline to an NT or Windows 95/98 workstation and run the Server Transfer from the workstation. This is a one-time only activity and the PeopleTools upgrade can continue using the PeopleTools and application codeline from the Novell file server.

After transferring the files (on any of the operating systems listed above), we suggest you recompile the COBOL on the application server to incorporate any modifications delivered with the Remote Call programs.

8. If you are using the PeopleSoft Web Client, transfer the PeopleTools 7.61 files to the web server.
 - **UNIX.** Use PSWEBFTP.BAT to transfer the files.
 - **Windows NT.** Use PSWEBXFR.BAT to transfer the files.

9. Transfer files from the file server to the batch server.

- **UNIX, AS/400, OS/390, or VMS.** Run PSTRANS.EXE to transfer the PeopleTools 7.61 files, then recompile and relink COBOL.
- **Windows NT.** Copy the PS_HOME\Src\Cbl directory manually, then recompile and relink COBOL.

10. If you are using the Message Agent API Client, you'll want to update the files in the directory where it resides.

During the upgrade, the Message Agent components on the server automatically get updated. However, to update the components on the client you'll need to run one of the following scripts depending on your operating system. You can find both scripts in the Setup directory under PSHOME.

- **UNIX.** Run MSGAPICP.SH.
- **Windows NT.** Run MSGAPICP.BAT.

11. Recreate any application server domains.

A PeopleTools-Only upgrade may contain revised application server templates with new parameters. You will not be able to benefit from the new parameters if you do not recreate the domain(s). Use the appropriate PSADMIN template (small, medium, or large), and specify the values contained in your previous PSAPPSRV.CFG file so that you can retain your tuned variables. If you have not tuned the domain, keep the defaults.

12. Configure web sites (**Web Client Users only**).

If you are using the Web Client, use PSADMIN to generate and configure each web site. If you have implemented Distribution Units (DU), the Java Package Manager option, make sure you update your web site. For instance, here is a *sample* showing the related and updated applet parameters.

```
<PARAM NAME=namespace           VALUE="PeopleSoft Java Client v761i">
<PARAM NAME=useslibrary          VALUE="PeopleSoft Java Client v7.61i">
<PARAM NAME=useslibrarycodebase  VALUE="javaclient_idu.cab">
<PARAM NAME=useslibraryversion   VALUE="7,61,0,0">
```

For more information about Distribution Units, refer to the Release Notes for PeopleTools 7.56.

13. If you installed PeopleTools 7.61 to a different directory from prior PeopleTools 7.5x releases or if you distribute PeopleTools locally to each client workstation, then you will need to start Configuration Manager and run the Install Workstation process at each client.

This will install any modified DLL's to the Windows Client.

14. Use Data Mover to run the following Data Mover scripts (DMS) against all databases that will use PeopleTools 7.61 (except AUDB).

- **MSGTOOLS.DMS.** This script loads any new messages to the database. Messages can be informational or error messages. You can find this script in <PS_HOME>\Scripts.
- **STOREPT.DMS.** This script will update PeopleTools stored statements to reflect any new COBOL changes. You can find this script in <PS_HOME>\Src\Cbl\base.
- **MSGTLXXX.DMS.** This loads the new translated informational and error messages. For each non-English language you installed in your database, run the corresponding MSGTLXXX.DMS script, substituting the three-letter PeopleSoft language code for XXX. For example, if you have Canadian French and Spanish translations installed in your database, run MSGTLCFR.DMS and MSGTLESP.DMS. You can find this script in <PS_HOME>\Scripts.

DB2/OS390 Note. Customers who installed PeopleSoft using a PeopleTools version earlier than 7.57 in a subsystem with DECARTH=DEC15 settings, rerun CREATEVW.DMS using PeopleTools 7.57 (or a higher version) to recreate all views.

15. Boot your application servers, web servers, and Process Scheduler servers.
16. After applying this minor release, launch PeopleTools and check the **Help, About** dialog box, which should display PeopleTools 7.61.

New Features and Highlights

The following topics address new features or incidents of particular interest in this release. Some topics include instructions for how to implement and use a particular feature.

Note. We recommend that you add any new instructions to your existing PeopleSoft documentation and make it available to the individuals who are most likely to use the feature.

For a list of the incidents that were fixed in PeopleTools 7.61, refer to the [Resolved Incidents](#) table at the end of these Release Notes.

Batch Components

A list of changes to SQR and COBOL components is provided to assist in planning your testing and implementation of this PeopleTools release. PeopleTools posts a list of the changed batch components in the Updates and Fixes site on Customer Connection. With each listed component you can expect to see the following information:

- A short description of the change.
- The associated TPRD incident number and title.
- A report which describes the differences between the “new” and “old” component.

SQR

For the changed SQR components in PeopleTools 7.61, see the following incident in Updates and Fixes:

T-DRUSCH-YC4DF PreRelease Notes - PeopleTools 7.61 - SQR changes

COBOL

For the changed COBOL components in PeopleTools 7.61, see the following incident in Updates and Fixes:

T-DRUSCH-5Q2WX PreRelease Notes - PeopleTools 7.61 - COBOL source changes


Application Designer

Please make note of the following change to Application Designer.

Field Definitions

T-ODUPREZ-4BF3T

The Descr Long Name of a field definition is now a required field. If the Long Name of a field definition is left blank, the user will not be able to save the field until they enter something for the Long Name:

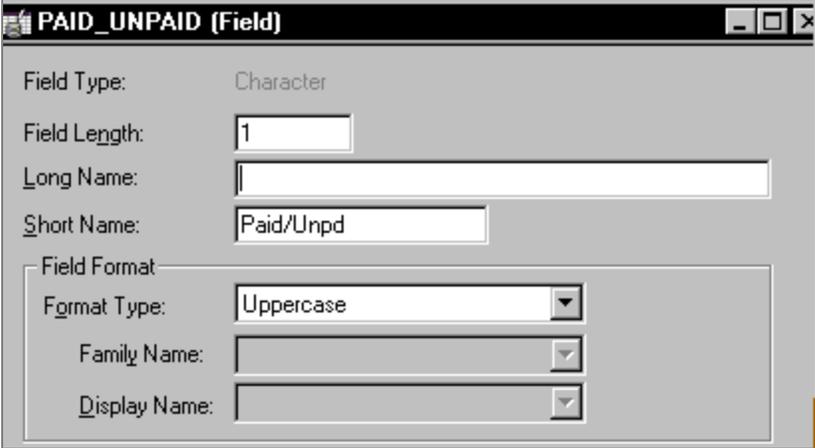

The screenshot shows a dialog box titled "PAID_UNPAID (Field)". It contains the following fields and controls:

- Field Type: Character
- Field Length: 1
- Long Name: (empty text box)
- Short Name: Paid/Unpd
- Field Format: Uppercase (dropdown menu)
- Family Name: (dropdown menu)
- Display Name: (dropdown menu)

Note. If the Long Name field is left blank, a warning message will prompt the user for missing information.

Cube Manager

You should be aware of the following minor change to Cube Manager.

Attribute Name Modification

T-SSHAIK-8385Y

With PeopleTools release 7.61, we've made a minor change to the Cube Manager Attribute Names. Business Unit is no longer set as an attribute by default. You may still add this attribute yourself by using the Attribute Name page.

Database Server

The following information describes a change to the Database Server.

New Script for Oracle/NT 8.0x Customers

T-SCORBI-VE83F

Oracle/NT 8.0.x changed the locations of several SQL files that Peoplesoft uses as part of the installation process. As a result, we added a new script with PeopleTools 7.61. The new script, PSADMIN80.SQL, is a clone of PSADMIN.SQL but is used only for Oracle/NT 8.0.x.

Note. PSADMIN80.SQL is a new script that is delivered for Oracle/NT 8.0.x Customers only.

Note to Oracle 8.1.7 Customers

T-SSUBRA-8D4ZK

If you are using Oracle 8.1.7, the Cost Optimizer Mode may not work properly (it returns the wrong rows). To correct this issue, you need to set the following init.ora parameter:

```
OPTIMIZER_FEATURES_ENABLED = 8.1.6
```

Note. If you are using Oracle 8.1.7 you must change the parameter as noted above in order for the Cost Optimizer Mode to work properly.

HTML Access

If you are utilizing HTML Access, please add the following information to your existing documentation for HTML Access.

Known Limitations

T-EBLAZI-DM46G

You should be aware of the following limitations to HTML Access:

Application Designer

- Unable to generate HTML for panels with image data (like an Employee Photo, for example).
- With HAD and Grid designer, make sure that all columns in a grid are visible without scrolling; otherwise, you will receive an error message and the grid will not generate HTML/ASP.

Message Agent

- Search Date field is in YYYY-MM-DD format.
- Search PeopleCode is not supported.
- All keys in the search record must be marked as search Key and List item.
- Maximum scroll level in panel: Level 1.

Run Time

- Client-only PeopleCode (e.g. WinExec) will not work.
- FieldEdit/FieldChange will not be executed when you tab out of a field. It will execute only when you submit the entire form.
- All field changes are batched/applied one at a time on the server side. The order in which fields are set may not be the same as the order in which the user filled them.
- Default values are not set on row insert (only on initial display and after a save).
- Related display fields will not refresh until you select Save.
- Calculated fields based on values in other fields must be display-only.
- setSearchDialogBehavior PeopleCode is not supported.
- The high order key needs to be on the panel for the prompt dialog to display.

- No support for conditionally hiding fields and no support for PeopleCode that manipulates the GUI at Run Time.

Application Designer and Run Time

- No support for secondary panels.
- No support for calendar controls.
- No support for trees.
- Maximum number of Level 1 scrolls per panel group: 1.
- PeopleSoft global variables are not supported.

For more information about HTML Access and limitations to the product, refer to the HTML Access document (available on Customer Connection). You should also be sure to review each set of release notes for information on features that were added after the initial release of HTML Access.

PeopleCode

The following information is a PeopleTools 7.5 PeopleBook update.

Clarification to PeopleTools 7.5 PeopleBook: Development Tools, PeopleCode

T-CRAMES-ZX25N

Note. The information contained in the PeopleTools 7.5 PeopleBook: Development Tools, PeopleCode, should be modified slightly to clarify the library extension information for Windows and UNIX.

In the PeopleTools 7.5 PeopleBook: *Development Tools, PeopleCode, PeopleCode and Three-Tier Architecture (Calling Dynamic Link Library Functions on the Application Server)*, a small clarification should be made to the third paragraph. Text should be modified as follows:

The PeopleCode declaration and function call syntax remains unchanged. For example, the following PeopleCode could be used to declare and call a function **LogMsg** in an external library Testdll.dll on a Windows client or a Windows application server, or a libtestdll.so on an UNIX application server:

```
Declare Function LogMsg Library "testdll" (string, string)
Returns integer;

&res = LogMsg("\temp\test.log", "This is a test");
```

In the PeopleTools 7.5 PeopleBook: *Development Tools, PeopleCode, PeopleCode Reference*, (Built-in Functions and Language Constructs, Declare Function) the third paragraph under the heading Description should be modified as follows:

To support processes running on an application server, it is possible to declare and call functions compiled in dynamic link libraries on a Windows (*.dll) files, and shared libraries on UNIX (lib*.so). The PeopleCode declaration and function call syntax is the same regardless of platform, but UNIX libraries must be compiled with an interface function.

Under the heading External Library Functions, the first two paragraphs should be modified as follows:

Function declarations define routines in an external (C-callable) library. The function declaration provides the name of the library, an optional alias *module_name*, a list of parameters to pass to the function, and an optional **Returns** clause specifying the type of any value returned by the external function, and the PeopleCode data type into which to convert the returned value. The library must be a DLL accessible by Windows, or shared library accessible by UNIX.

Once you have declared an external library function, you can call it the same way as an external PeopleCode function. Like PeopleCode functions, you must pass the number of parameters the library function expects. Calls to external functions suspend processing: this means that you should exercise caution to avoid “think-time” errors when calling the function in the following PeopleCode events:

- SavePreChange
- SavePostChange
- Workflow
- RowSelect
- Any PeopleCode event that fires as a result of a ScrollSelect, ScrollSelectNew, RowScrollSelect, or RowScrollSelectNew function call.

Under the heading External Function Parameters, the information for *lib_name* and **Alias** *module_name* should be changed as follows:

<i>lib_name</i>	A string representing the name of the external library. The external routine must be located in a DLL named <i>lib_name</i> accessible by Windows, or an equivalent shared library in a UNIX system.
Alias <i>module_name</i>	Optionally specifies alias of module. The external module is invoked using the <code>__stdcall</code> calling convention on Windows.

Process Scheduler

Please note the following change to Process Scheduler.

SQL Trace for UNIX

T-SSAMPA-Z83JE

With the release of PeopleTools 7.61, UNIX customers now have the ability to perform a SQL Trace for Individual COBOL process via the Process Scheduler onto the Server (if the Scheduler is PSUNIX).

Web Client

If you utilize the Web Client, please make note of the following changes.

New Automatic Logout Parameter

T-GPATAN-3K49W

With this release we added a new automatic logout parameter to the PanelApplet feature. The new parameter is keyed to the Save button action to check the parameter and initiate the logout functionality in the applet. Users may specify whether they want to logout after each save through the use of the following Tag:

```
<PARAM NAME="Logout_At_Save" VALUE=false>
```

When the value is set to True, the Web Client will log the user out each time they press the Save button. If the value is set to False, the Web Client will save as normal.

Controlling the Speed of the Flashing Save Button

T-ACESAR-1C3DG

You now have the ability to set the rate at which the Save button flashes. The flash time can be controlled by adding the following tag to the HTML file:

```
<PARAM NAME="save_flash_time" VALUE=200> where 200 refers to milliseconds.
```

Windows Client

The following change was made to our Windows Client.

Saving Column Size in the Worklist Navigator View

T-DDETO-6P3R6

In prior PeopleTools releases, when a column was resized in the worklist navigator view, the column size reverted to the default settings each time the worklist view was refreshed. With this release, a change was made so that column size will be saved when the view is refreshed.

Note. Column width will be lost when the user selects the root folder (Worklist folder).

Workflow

The following change was made to Workflow in PeopleTools 7.61.

Maintaining the Scroll Position in a Worklist

T-DGIAMM-ZR1E5

You should be aware of a change we made to the way we process worklists. Now, when a worklist is refreshed, the scroll position will be maintained and the cursor will return to the item that was most recently worked.

Resolved Incidents

The following table lists the incidents fixed in this PeopleTools release. The table is sorted by product area, so incidents affecting more than one product area may appear more than once.

Note. If you skipped any 7.5x maintenance releases, we encourage you to download the corresponding Release Notes for the version(s) that you skipped. This way, you have a record of all the incidents that are addressed in each successive version. You can download the Release Notes for previous maintenance releases from the same area in Documentation from which you downloaded this document.

Subproduct	GSC#	Report ID	Incident Title	Incident Description
APIs - General				
		T-GNEWMA-ZT64Z	Support SQL Server 2000 in PSODBC and any additional code lines	
Application Designer - Field Definitions				
		T-ODUPREZ-4BF3T	CheckBox hidden when related field descr is blank - It would be great if the descr long & short of a field were required fields.	Check for field's long name and xlat field long name is blank. Prompt the user an error message. This would force the user to enter long name for field and xlat field, and it also prevent the problem from happening to the check box. Add new message 47,79 and 47,80 to the message catalog.
Application Designer - General				
	512769	T-PSCHWA-7F86E	When creating a project the German XLAT values are not included	When creating a project and inserting related XLAT values, the related language values are not included. This problem was caused by including LANGUAGE_CD in the select statement for retrieving the XLAT values. Only XLAT values for the base language were being returned. Removed LANGUAGE_CD from the select statement to solve the problem.
		T-MANTHONY-JK98T	Missing Prompt for Related Objects when Inserting Fields	Missing Prompt for Related Objects when Inserting Fields
		T-RWAGNE-2C42J	"Find Object References" doesn't identify PopUp Menus installed at the Panel Level	Add query to search popup menu in PANELS as well.
		T-KKIRSC-TC96D	Application Designer crashes with PSIDE	Hidden Fields in scrolls or grids will no longer be created (when eventually

Subproduct	GSC#	Report ID	Incident Title	Incident Description
			error when inserting edit box.	unhidden) with the wrong field format (e.g. MIXEDCASE vs. UPPERCASE).
Application Designer - Menu Definitions				
		T-RWAGNE-2C42J	"Find Object References" doesn't identify PopUp Menus installed at the Panel Level	Add query to search popup menu in PANELS as well.
Application Designer - Page Definitions				
		T-MMARTIN1-TVU94	Convert Scroll to Grid: Radio button display text attribute is incorrect	Set the display text of the converted dropdown list box accordingly based on the radio button label type of either Xlat Short or Xlat Long.
Application Designer - Record Definitions				
	RLS-20	T-RLS-7	Sub Record Print Out Looks the Same as Parent Record	Changed Sub Record print out to be unique.
Application Engine - General				
	625572	T-SBENNE-VM3HA	PERSDATA Application Engine process does not work after upgrade to 7.55	On some COBOL compilers the FILLER which is the last 4 bytes of SYS-TIME-F gets garbage after doing a MOVE CORR .To fix this we have added an extra MOVE statement to make it work across supported compilers.
		T-SSUNDA-N353A	Re-assess the workaround for PTPEEXEC because of Server Express bug related to TPRD T-LLIE-CM2YT .	PTPEEXEC needs to be changed to get around a strange error when using Server Express on UNIX. The workaround used before did not let the process compile on OS/390. So this code is changed with an appropriate workaround that works on all platform.
Application Engine - Runtime				
		T-LTHOMA-G82RC	PTPEEXEC.CBL should commit after INSERT into PS_MESSAGE_LOG	To prevent a lock from being held on the message log table, we added a COMMIT in PTPEEXEC.CBL, after the "Application Starting..." and "Application resuming..."

Subproduct	GSC#	Report ID	Incident Title	Incident Description
				messages are written to the message log table.
		T-LTHOMA-849C5	Subscript out of range on PTPECURS when &CLEARCURSOR used	Subscript out of range on PTPECURS when &CLEARCURSOR used when the cursors > 100
Application Server - General				
	1074455	T-ABANKA-8F5UA	Failed to establish SqlAccess service context for operator	appserver returns a service failure after the database is down and up again
	1107797	T-NWILSO-AK9SB	Revise Appserver, log fence 4, logging info to be more useful	Added improved logging with log fence = 4
		T-RVARGH-G76UB	PSAPPSRV crashes intermittently in MgrGetObject service.	PSAPPSRV crashes intermittently in MgrGetObject service. (The application server log shows crashes for MgrGetObject service).
	1104638	T-NWILSO-ZT4P8	Segmentation Violation in PSAPISRV - malloc_y.realloc_y(??, ??, ??) at 0xd0168b40	PSAPISRV crashes at GetLastErrorExplainText msg agent api call because the error text is over 512 characters
		T-RVARGH-HX3NH	PSAPPSRV crashes while executing server PprLoad	PSAPPSRV crashes while executing server PprLoad from Java client
		T-LZHUAN-BL64Q	replay of a dump file returns a different call stack on a NT vs. Solaris appserver	The deserialization of the PeopleCode evaluator state and global variables was not dealing with byte order differences between the serializer and the deserializer. This problem went unnoticed for so long because, in most cases, the serializ*Missing info!
	1156270	T-NWILSO-5Q6AG	PSAPISRV.939 - crash dump - Exception code = c0000005 when running database agent	Application server process crashes at executing RowScrollSelect or RowScrollSelectNew peoplecode
		T-RVARGH-D38W3	"Last Updated" datetime stamp for objects not seen in Application Designer in 3-tier	Add Fields LastUpdDttm and LastUpdOprld to defn mapping tables and have them serialized for Record, RecordField, Panel, PanelGroup, and Menu objects.
COBOL				
	625572	T-SBENNE-VM3HA	AE: PERSDATA Application Engine process does not work after upgrade	On some COBOL compilers the FILLER which is the last 4 bytes of SYS-TIME-F gets garbage after doing a MOVE CORR .To fix this we added an extra MOVE statement to make it work across supported compilers.
		T-SSAMPA-Z83JE	Cannot do a SQL Trace for Individual COBOL	

Subproduct	GSC#	Report ID	Incident Title	Incident Description
			process via the Process Scheduler on to the Server, if the Scheduler is PSUNX.	
		T-SKALUR-KG5CP	Fix for T-SKALUR-GM51F in Pt7.58 is Not complete. We are still ignoring the Parallelism Flag on MVS	The ability of users to control parallelism from JCL was overridden by code that always turned on parallelism. This fix removed that code.
		T-SMAYH-6R3UW	Changes to PTPUPRCS.CBL to accomodate the new stored statement added to PTPUPRCS.DMS	A new Stored Statement is added in PTPUPRCS.DMS and to accomodate this PTPUPRCS.CBL is also changed.
		T-SSAMPA-MQ9AG	Unable to run Pay Calculation process PSPPYRUN	
		T-SSUNDA-7F9E2	Give more relevant information on PLAN_TABLE when turning on Dynamic Explains on DB2/OS 390	
		T-SSUNDA-ZF5GQ	Dynamic Explain on DB2 OS/390 overrides the REMARKS column of PLAN_TABLE for every process , thereby losing previous process SQL statement information	<p>Changes to PTPSQLRT are made to give much better information for PLAN_TABLE information when turning on the Dynamic Explains.</p> <p>For our batch process we have made QUERYNO on the PLAN_TABLE correspond to the Peoplesoft Process Instance, APPLNAME on the PLAN_ATBLE correspond to Query number in the order the SQLs were prepared. This will work fine for Customers using Peoplesoft Process Schedulers as everything is tied to Process Instance. For Customer's running outside of Peoplesoft Process Scheduler they need to Delete the PLAN_TABLE everytime when run with Dynamic Explain turned ON for a particular process.</p> <p>Additional information is in the REMARKS column of PLAN_TABLE , we have supplied, SQL Statement Name,Process Instance and Runcntrl information.</p>
		T-SSAMPA-KA8CE	CBLBLD.BAT : Logic of the Batch file is not set correctly	CBLBLD.BAT was deleting of all existing GNTs/EXEs/INTS from PS_HOME\CBLBIN before checking for any COMPILE errors. Now the logic is changed, CBLBLD.BAT will abort and not copy EXEs/GNTs/INTs to PS_HOME\CBLBIN if there are any compilation errors.

Subproduct	GSC#	Report ID	Incident Title	Incident Description
Cube Builder				
		T-STSE-JL4KY	Back port of Cube Manager is not populating all dimensions in ESSBASE	Fixed the problem that tree leaf members without records in their application table didn't get picked up when building cube.
Cube Manager				
	1111815	T-SSHAIK-VW94J	Cube manager does not consolidate alternate rollups properly	Made consolidation done for all rollups in Essbase by default.
	1122702	T-SSHAIK-4F43R	Cube Manager: Log files should go into User specify location.	In order to ensure unique log file names that can be identified by users when using the Cube Builder, all log files are now named according to the following format: <User ID>-<RunInstance>-<Process Instance ID>.log
	1122723	T-SSHAIK-K648W	Cube Manager: Client needs instance number for query.err file	In order to ensure unique query.err file names when using the Cube Builder, all query.err files are now named according to the following format: <User ID>-<Fact Query Name>-<Process Instance ID>.err
	1121919	T-SSHAIK-7P4PE	Cube Manager is not populating all dimensions in ESSBASE	Fixed the problem that the leaf members in a tree that have no records in the user-defined table didn't get picked up in Cube Builder process. Fixed the "Out of available memory" problem when a tree is big.
DB2/MVS				
		T-MDE VI-H27GA	DYSQLOG is always turned on and so need to change code to handle it conditionally	DYSQLOG was always getting written even if not required/desired .Added logic to turn on dynamic SQL tracing only if the 7th parameter in PARMFILE DD (SQL Trace) is set to Y.This makes SQL tracing to be controlled with one just parameter as
		T-CMICHE-A93V7	Code which modifies underscore in process name -- changing '_' to '@' should be modified to also substitute alpha character when first character is numeric (Db2/Os390)	%PRCSNAME% meta string could not be freely used in the JCL if it starts with numerics. If it used for DD Name /Step Name it comes down with a JCL error as it does not adhere to the naming convention of the JCL Step Names and DD Names. Code
Decision Support - General				
		T-WCHONG-5F683	Memory leak in drill query	This fix corrects a memory leak problem in the nvision drill down.
HTML Access				
		T-CDODT-JG8FX	Application designer GPF's when opening	Application designer GPF's when opening another business process subsequent to

Subproduct	GSC#	Report ID	Incident Title	Incident Description
			another business process subsequent to generating HTML documents for HTML Access	generating HTML documents for HTML Access
		T-GPATAN-9B8ND	HTML Access : XLAT values for an inactive effective dated value are being generated	HTML Access : XLAT values for an inactive effective dated value are being shown
		T-DCOLI-DJ8W4	HTML Access: Cached data still available after Exit when going Back Internet Explorer 5	HTML Access: Cached data still available after Exit when hitting the Back Button
	1123700	T-DCOLI-RU48E	HTML Access: Prompt dialogs are not displaying distinct data	HTML Access: Prompt dialogs are not displaying distinct data
	1197864	T-SRACHA-UQ6NS	HTML Access: Try to Signon to HTML Access gives "HTTP Error 400" in Netscape Navigator 4.7.	HTML Access: Blank directory name for HTMLAccess gives "HTTP Error 400" in Netscape Navigator 4.7 when signon.
Informix				
		T-STHACH-SJ56P	Informix provided esql script included in CSDK 2.40.HC1 on HPUX 11 needs to be modified because it is causing unresolved symbol when trying to bring up the Application Server with newer HP patches of PHSS_16931 (milli.a patch) and PHSS_16849	Modified Informix esql shell script.
Informix API				
		T-STHACH-SJ56P	Informix provided esql script included in CSDK 2.40.HC1 on HPUX 11 needs to be modified because it is causing unresolved symbol when trying to bring up the Application Server with newer HP patches of PHSS_16931 (milli.a patch) and PHSS_16849	Modified Informix esql shell script.
Logon Process				
	736680	T-LCROSS-E98AT	If initial window is set to QUERY in the configuration manager	If initial window is set to QUERY in the configuration manager and the user logs in to PeopleSoft using pstools.exe, PS/QUERY

Subproduct	GSC#	Report ID	Incident Title	Incident Description
			and the user login to PeopleSoft -PSQUERY displays minimized in the task bar W95	displays minimized in the task bar Win95. This does not occur on Windows NT.
Mail/Forms API				
		T-MFONG-0X7B1	PeopleSoft is sending an attachment that does not exist in Workflow. Ct is expecting an error, however the e-mail gets sent and it creates a blank attachment.	PeopleSoft is sending an attachment that does not exist in Workflow. Ct is expecting an error, however the e-mail gets sent and it creates a blank attachment.
Managers General				
		T-NWILSO-SZ9NN	MdmFreeDiscardMi PSAPPSRV crash	Application server crashes at MdmFreeDiscardMit function call
Message Agent				
		T-DCOLI-UE5QS	Message Agent fails to update numeric fields when Windows workstation has non US regional settings	Changed PSAPISRV so that it uses the locale regional settings passed from the MA client when rounding number values. (The rounding routine is called for every number value -- the routine itself determines what rounding, if any, is needed.)
nVision - RunTime				
	1138393	T-SHUCKL-GW3FY	NV: The fix T-SHUCKL-BE7UL is incomplete and doesn't address all test cases.	PS/nVision did not always generate a detail row or column for the blank (or "(None)") value when nPloding a tree containing a blank.
Oracle				
		T-SCORBI-VE83F	PSADMIN.SQL needs updated directory names for Windows NT	ORACLE/NT 8.0.x has changed the locations of some of the SQL files that Peoplesoft uses. To overcome this, a new script was added which should be run only if ORACLE/NT version is 8.0.x.
Panel Processor				
		T-ODUPREZ-4BF3T	CheckBox hidden when related field descr is blank - It would be great if the descr long & short of a field were each required fields.	Check for field's long name and xlat field long name is blank. Prompt the user an error message. This would force the user to enter long name for field and xlat field, and it also prevent the problem from happening to the check box. Add new message 47,79 and 47,80 to the message catalog.
	957355	T-SSANAG-6V7HF	"Trace Start of Programs" PeopleCode tracing causes	PeopleCode Tracing will no longer cause PeopleTools to crash on exit.

Subproduct	GSC#	Report ID	Incident Title	Incident Description
			PSTOOLS.EXE to die on exit .	
	1134301	T-MCOWEN-BF4YL	PSIDE.EXE error when number of NATIONAL_ID stored formats reaches approximately 270	In Application Designer, under Tools->Miscellaneous Objects... Field Format will no longer crash if too many formats are added (i.e. 281 or more stored and/or displayed formats).
		T-MHUEY-YC8ZE	UOM Saved in Lower Case	Hidden Fields in scrolls or grids will no longer be created (when eventually unhidden) with the wrong field format (e.g. MIXEDCASE vs. UPPERCASE).
PeopleCode - Debugger				
		T-MWINNI-8F2SY	PSTools crashes on exit if PeopleCode Trace "Trace Start of Programs" (SetTracePC() flag 64) is on.	Setting PeopleCode Trace "Trace Start of Programs" (SetTracePC() flag 64) on will no longer cause PeopleTools to crash on exit.
PeopleCode - Designer				
	1099777	T-NMODY-Q23F8	Problems while inserting a null value in date field (save pre-change)	Problems while inserting a null value in date field (save pre-change)
PeopleTools General				
	1115374	T-SSAMPA-HT5HT	Process scheduler crash with System Error Code 2: PS_Exec(P):	Process scheduler crash with System Error Code 2: PS_Exec(P)
	1164487	T-SSAMPA-ZC8Y3	PSADMIN: Unable to run Generate web components in PT 7.60	PSADMIN: Unable to run Generate web components in PT 7.60
	1176506	T-FIBARR-7V3L9	Workflow - Worklist Entries panel First & Last Item buttons not working	pc change in WF_SCROLL_WRK.LAST_PB.FieldChange and WF_SCROLL_WRK.FIRST_PB.FieldChange.
	1179782	T-SSAMPA-S99QL	Unable to run PSRUN.MAK for the SYBASE Environment on HP-UX	psrun.mak doesn't take into account the directory structure change with Open Client 12.
		T-GROMIT-6218701	Setspace is defaulting to PSTABLE tablespace Instead of PTTBL	Setspace.sqr is defaulting to PSTABLE tablespace Instead of PTTBL
	1191258	T-ECARMI-C94V8	Error message (25,26 Duplicate detail range found: %1 %2) has	Message was updated to contain %1%2

Subproduct	GSC#	Report ID	Incident Title	Incident Description
			wrong translation to portuguese.	
	1186971	T-JMUNOZ-7453V	Save function is not saving the changes made to the	popup message will ask user whether they want to save changed panel before transfer to another panel group.
		T-KNELSO-MW7XA	PSTOOLS.EXE - Application Error: The instruction at '0x28007907' referenced memory at '0x0000000d'. The memory could not be "read".	Grids with the Employee Record Number or Benefit Record Number field in them will no longer crash tools when brought up in non-MultiJob mode.
Performance - General				
		T-DSOBLE-FL2ZM	Performance: In PprIsLengthCheckingRequired do GenGetOptions call conditionally	Enhanced deserialization performance in panel processor.
		T-DSOBLE-P665A	Performance: 7.6/JavaClient, when we do deserialization we do wcstombs 2 times	Inline SetOrgValue to avoid extra memory allocation in Deserialize routine to increase Web Client performance
		T-DSOBLE-H79X3	Performance: 7.6 Retrofit CReadStream and CWriteStream functions (from 8.1)	The Java Client no longer transforms strings to and from UTF-8 when sending them over the network to the application server. This was done to improve client and server CPU performance because a lot less processing is required. It does however,
Porting (Unix)				
		T-RFRANK-D92BL	Remove external access to decoding routine in libpssqlapi.so (Version 7.6x)	
Process Scheduler				
		T-SSAMPA-Z83JE	Cannot do a SQL Trace for Individual COBOL process via the Process Scheduler on to the Server, if the Scheduler is PSUNIX.	
		T-SMAYH-6R3UW	Changes to PTPUPRCS.CBL to accomodate the new stored statement added to PTPUPRCS.DMS	A new Stored Statement was added in PTPUPRCS.DMS and to accomodate this PTPUPRCS.CBL is also changed.

Subproduct	GSC#	Report ID	Incident Title	Incident Description
	1062753	T-SSAMPA-W52EN	Process with run always does not behave the same way	When process scheduler submits a job and there is an error on the previous process, the next 'run always' process in a job is not always fired off.
		T-SSAMPA-KA8CE	CBLBLD.BAT : Logic of the Batch file is not set correctly	CBLBLD.BAT was deleting of all existing GNTs/EXEs/INTS from PS_HOME\CBLBIN before checking for any COMPILE errors. Now the logic is changed, CBLBLD.BAT will abort and not copy EXEs/GNTs/INTs to PS_HOME\CBLBIN if there are any compilation erro,
		T-LTHOMA-MY6YP	Scheduler purges Processes with RUNSTATUS Not Successful (10) . Row needed for AE Restart	Scheduler purges Processes with RUNSTATUS Not Successful (10)
PSWeb Deploy				
		T-SHAM-9485Z	PsWebDeploy not filling in appserver information	PSWebDeploy (actually, PSLAUNCH) will now read environment variable info from the "Release7.5" tree, even if the current release is 7.6x or 7.7x, etc. as long as it's still in the 7.5 maintenance release line of products.
		T-CHARRI-MM3K7	PSWebDeploy: Leading zero for patches truncated.	
Query - Design				
	736680	T-LCROSS-E98AT	If initial window is set to QUERY in the configuration manager and the user login to PeopleSoft -PSQUERY displays minimized in the task bar W95	If initial window is set to QUERY in the configuration manager and the user logs in to PeopleSoft using pstools.exe, PS/QUERY displays minimized in the task bar Win95. This does not occur on Windows NT.
	929754	T-PSCHWA-3V3R5	Translation issue when the user has a different language than the base language.	make QpmFindFieldOffset() aware of same table can be used more than once, so it will check not only record name and field name, but also check for Corr name.
Query - RunTime				
	1048785	T-PSCHWA-FU65J	Query doesn't show descr long fields when executed as non base language operator	add a special case for handling LONG CHAR and IMAGE field when retrieving from Related Language table
	1150871	T-AFREIT-PD8HD	Query references a Tree Node that has a comma in it, the user gets error "out of available memory F/	When creating a query in the query designer using in tree criteria and selecting a node with a name that contains a comma, the "Out of Available Memory..." error appears. This happens because the query designer

Subproduct	GSC#	Report ID	Incident Title	Incident Description
				does not support tree node names that contain commas. Put in a check when the user selects the node to make sure the node selected doesn't contain a comma. If it does, the user will receive an error message and it will not allow them to select that node.
Row Level Security				
		T-BRETTFAVRE-EYD7Z	Operators can DELETE their own data	Operators can not DELETE their own data using F8
Security - General				
		T-BRETTFAVRE-EYD7Z	Operators can DELETE their own data	Operators can not DELETE their own data using F8
		T-JPELAY-ZT42V	Operator Classes with overlapping sign on times locks up security administrator.	Under certain conditions Security Administrator will hang while using all CPU cycles. This occurs when signon times between multiple operator classes overlap or nest within each other.
SQR				
	861276	T-TYASOD-VL87G	'RoundCurrency' function doesn't work correctly with no decimal currencies on Oracle	Added a %DateOut wrapper around the EFFDT column in the SQL statement that reads in the Currency Code table.
		T-GSALMO-VR6NZ	CURRND.SQC is causing a TABLESPACE Scan in DB2/OS390	
		T-KKIRKE-RM6MT	PTSQRTST fails on MSSQL 2K on NT	
SysAudit				
		T-SKALUR-015JQ	SYSPLNGR.SQC has a missing Where Clause in PNLGR-5 & PNLGR-4 causing erroneous results	SYSPLNGR.SQC was changed to add a 'Where' clause in PNLGR-5 & PNLGR-4 sections to prevent some erroneous results.
		T-DDUMAI-JZ9HA	Correct Subrecord calls to improve SYSAUDIT performance problem.	
Tree API				
		T-KKIRSC-UU3XL	HTML Tree Manager: Inconsistent problems when branching and unbranching nodes in a tree.	

Subproduct	GSC#	Report ID	Incident Title	Incident Description
Tree Manager - Internet				
		T-KKIRSC-UU3XL	HTML Tree Manager: Inconsistent problems when branching and unbranching nodes in a tree.	
Web Client - General				
		T-GPATAN-3K49W	Add an automatic Logout parameter to the Java Applet	
		T-SROSEM-YX2VC	Web Client FDM: Invalid Required Field inhibiting panel progression	When this panel was loaded in the webclient a required field was set as the current field in the PPR, even though the field did not have focus. So when the user pressed the button the web client thought the user was leaving a required field without entering a valid value, even though visually they were not in the field. This fix now prevents this check if the field itself does not have focus, i.e. the cursor is not in the field. However if the cursor is in the field then the web client will operate the same as the windows client and give an error explaining that the field is required and the user must enter a valid value before leaving it. This fix makes the web client operate more consistently with the windows client.
	1009185	T-SRACHA-HK9T4	HTML Access does not identify the "&" in a prompt values for a Prompt Field.	Can't select "&" from the prompt result. Replaced "&" with %26 encoding, where 26 is equivalent to the hexadecimal number representing the character "&", so it can be read as a true "&" character in the URL rather than as a separator symbol in a query string.
		T-RSRINI-N92WH	Web Client - in search dialog box, if the no. of rows in the database is more than the rows displayed in the list of values, the informational message at the bottom of the panel 'More matching entries were found than can be displayed' does no.	If the search in a search dialog returned over 250 entries the user is told that there are too many results to be displayed. This message is displayed below the table in which the results are displayed. It is recommended that the user enter more search information so the results are more focused and less in number.
	1034406	T-WHOELT-JM38A	Simple Worklist Applet: 2 Paramteres INCLUDE_FIELD_LIST	Fixed bugs with the code that interprets and sets up the internal tables pointing to the appropriate data based on the applet

Subproduct	GSC#	Report ID	Incident Title	Incident Description
			and EXCLUDE_FIELD_LIST not working properly	parameters.
		T-CRINEH-QL7TR	Partial Search not finding all matches on Update/Display from panel	There was a problem with a specific type of search dialog so when a user called a search dialog from a panel the search retained information from the previous record that was open. This fix prevents this from happening so the search will return the correct results.
	1080554	T-KCHIAN-XK2GG	Web Client : IE Browser crashes while inserting new row in a Dropdown list, in 'My Personal Information'	This fix prevents the web client trying to put a cursor focus on an Xlat table component. This problem caused the web client to crash the browser it was launched.
		T-LTEDJA-M69XU	Web Client: %EDITTABLE as the Prompt Table Edit will give an error if the value after computation is an empty string.	%EDITTABLE as the Prompt Table Edit will give an error if the value after computation is an empty string.
		T-LTEDJA-4K7D8	Web Client: Prompt Table in Mass Change panel does not return any value	Prompt Table in Mass Change panel does not return any value
		T-RFROST-BA9PD	Web: Getting a java.lang.ClassCastException after an application server error (or session timeout)	
	1125533	T-PSCHWA-5L854	Error - Invalid time length, must be from 3 to 6 numeric digits before the decimal point using a point as a time seperator.	Changed the Record field to accept this time format where the value before the "." indicates the hour and the.
		T-RFROST-G89PL	Web: Pressing browser back button with a SearchDialog showing causes a NullPointerException	
	1126563	T-SRACHA-846ES	Setlabel() command not working on a Push Button in Secondary panel for Web Client.	When the user had peoplecode to change the label of a pushbutton when it was clicked the web client did not change the actual label of the button but instead only changed it internally. With this fix in place when the user sets SetLabel in peopleCode the webclient actually changes the label on the button. However when the window the button is on is closed, the change is lost.

Subproduct	GSC#	Report ID	Incident Title	Incident Description
				This is now consistent with Windows client.
	1132707	T-NCAMAR-D38XK	PS Exit button at the top of the panel on the summary panel does not work	Any panel group that does a cancel would prevent the logout toolbar button functionality from being used after the cancel occurred.
		T-THASSL-G54QS	Web Client Security: Automatic Login by 2 users without closing browser/logoff allows the second user to view the first's data. This is an issue in kiosk situations.	Scripted approaches to producing the applet parameters weren't using the information on subsequent pages. This would mainly be a problem for kiosk applications.
	1136136	T-SCHAND-DG3EH	Selected lines are not deleting in grid when focus is on a list box and giving Java Error.	Previously in the web client when the user clicked on a Drop down box and then tried to delete it, the wrong row was deleted. This bug has been fixed. Also when they deleted the last row in the grid a null pointer exception occurred. This bug was also addressed in this incident.
	1147536	T-PLIVER-BB24W	Drop Down Boxes (prompts) Not Working On Web, if they use views with department security.	Cleaned up the SETID handling in the Web Client panel processor
		T-EGAFFN-LB9Z2	WEB client-SimpleWorklist problem. Can work again on a "worked" worklist. "Mark Worked" does not refresh the list	This fix prevents the user from accessing rows that have been marked Worked. If they click on a row that has status of "worked" they are given an error stating the following - " The item you requested has already been worked. Items in the Worklist are only available until worked (or marked as worked). Please pick another item or press refresh to show only unworked items." They can no longer launch a panel that has been marked worked. When they press refresh this row will be deleted from the list. This fix make the web client operate more consistently with the windows client.
		T-THASSL-GK2EL	Internet Explorer Java Package Manager / Active X install possible solution needs to be implemented and tested to see if it works.	Internet Explorer package manager install may have failed for some releases of the browser because of a mis-match in the install script.
		T-SCHAND-TA37X	PT 7.60:Web Client: (using plug in 1.2.2.005/007and Netscape 4.75) Ct cannot see cursor	Sun Plugin users could no longer see the I-beam edit cursor when the page is first shown unless the progress frame was turned off.

Subproduct	GSC#	Report ID	Incident Title	Incident Description
			moving when tabbing along different fields. Case Id 1169970	
		T-SDOU-PH2CA	Web Client: Catch Java error when hit prompt table in ERP.	Null pointer exception when SETID is defined as key but the value is not set
		T-LTEDJA-267WX	Web Client: Catch Java error when hit prompt tables in ERP	When a prompt table has no edits and was clicked upon, it reported and an exception to the user. This fix handles the event internally and outputs a more useful error and one that is consistent with what the windows client outputs.
		T-SDOU-7M9KY	Search dialog still shown when clicked "OK" under" session expired"	When the web client timed out it didnt close a search dialog if it was still open. This fix rectifies this problem so when a time out occurs the search dialog is closed along with the panel and the user no longer see's a null pointer exception.
		T-KNAHM-WS9CF	WebClient producing a crash dump on SNI	
	1203614	T-CCHEN-6K8P7	Web Client: Subpanels are not fully shown on Web Client after changing the standard panel size.	The problem was when a new panel was loaded its size was not checked and instead the size of the original was used. This fix now checks the size of the panel and changes the new applet size and panel size in accordance so the new panel is displayed properly.
		T-EGAFFN-E77JB	Columns not displaying properly on search dialog	This incident fixes a bug in the search dialog. When the grid was created the rows did not get painted correctly i.e. they did not finish where the column header did. They now appear correctly.
Web Client GUI				
		T-UPURANIK-H4A1G	SelfService - WEB - Hiding a scroll is not hiding the grid	There were scrollbars showing in the web client even though there was no data showing. This became significant when the peoplecode HIDE_SCROLL was used as the scroll looked out of place with no components beside it. I fixed this so that if a scroll has no data then it will not be visible.
	576909	T-GPATAN-944JM	Web Client : "Carriage return" characters are not correctly converted to a DB2 database	"Carriage Return" characters entered in the Java Client are not correctly displayed in the Windows Client.
	1089521	T-SRACHA-L74S2	Web Client: Web users need to see the fields defined in the Worklist Record as they see in Windows.	Web users can see the fields defined in the Worklist Record as they see in Windows.

Subproduct	GSC#	Report ID	Incident Title	Incident Description
		T-ACESAR-1C3DG	Control for speed of flashing save button for web client - 7.59+	
		T-TVOLLR-BL8K9	7.60/7.60.03 - JavaClient - Search Dialog repaint not working	The search dialog was not being repainted immediately after the search button was pressed. If no values were found for the search the piece of text appears immediately.
Web Client Panel Processor				
	1102066	T-JJONG-3D8ES	Web client worklist after upgrade to 7.59 does not give panel immediately, but first the search list	The multiJob configuration wasn't being set correctly in the Worklist Applets and so the SearchStartService was telling the Java Client to prompt the user when the keylist contained either an empl_rcd or benefit_rcd.
	1151992	T-PLIVER-8C7SB	Transfer () brings up Search Dialog Box using Web Client, even if all keys are supplied. Works in two and three tier.	Cleaned up keylist handling for Transfer peoplecode function, and searchsave system edits when no peoplecode on the search record.
	1153139	T-PLIVER-BA84S	Greyed (Grayed) Drop-Down Fields Can Be Changed/edited and saved on The Web	When the user clicks on the grayed out box the web client does not process the action. Before the fix it assumed the user was clicking on another non grayed out box.
		T-RFROST-SG6KA	Web: Transfer PeopleCode is not using the keylist like the Windows Client	
		T-RFROST-E9659	Web: SearchSave edits are only being called if there is PeopleCode on Search Record	
		T-RFROST-N773Y	Web: Add Mode search dialog is not allowing user entry on program supplied fields values	
Windows Client - General				
	1045260	T-NCAMAR-D77B6	EX/WEB: While in Description panel - in Comments field press tab key to go to the next field and cursor does not move-remains in the Comments field	The user can now tab into grids on a panel in the web client. Before this the user would have to first click on the grid and then start tabbing. This problem has been over come. They can also Backtab out of a grid into normal components. This beings the web client tabbing operate more like the windows client. However when the last cell in the grid is reached, and a tab is hit, nothing will

Subproduct	GSC#	Report ID	Incident Title	Incident Description
				because due to the sturcture of the webclient it is very difficult to get the curser to return to the first cell in the panel. However the user can use the back tab to return to the first cell.
Workflow - General				
		T-SCLOUS-ZB6V5	When login as VP1, no entries show up in List View.	In CWorklistListView::BuildList(), ff BpmGet fails, do not stop processing, just skip to the next one.
		T-DGIAMM-ZR1E5	Workflow: Cursor Return on Worklist "Worked" Item	
	1149376	T-RSEPE-L29QX	Workflow not able to send emails to all 60 coordinators -- limit is 44 before PprSave crash	Application server crashes when Workflow tries to send emails to more than a certain number of users.
Workflow - Virtual Approver				
	494204	T-DNGUYE-U582H	Virtual Approver is not behaving as it should with parallel paths	Update Step Status for the path #2 in a same step.
Workflow - Worklists				
	662723	T-DNGUYE-NK6BC	Marked Worked automatically refreshes worklist and loses current cursor	When 'Mark Worked' is pressed and an entry is deleted from the list, the next item in the list will be highlighted. If the last item is deleted, the previous item will be highlighted.
	869807	T-MMEYER-WB9FD	Clicking on Activity name resets columns to original width.	Refresh the List View only when a new tree node is selected.
		T-SCLOUS-R6244	When login as VP1, cannot vew worklist via View/Navigator/Worklist.	while building a worklist tree, If there is an error while generating a tree, do not stop process but continue to the next worklist.
	1148828	T-RHUTCH-ZX8SG	Monitor via Context fail to function when a Worklist calls a step in another Bus Process.	Retrieve entries whose Route type is Worklist only and modify peoplecode so, ScrollSelect() will work.
WorkLists				
		T-DDETTO-6P3R6	Column widths are not maintained in the worklist views in the Worklist Navigator	

Edit History:

1. 04/06/2001 Original version of the 7.61 release notes.